


1230 Quarter Turn Ball Valve PN25 - (brass chrome plated) - red lever

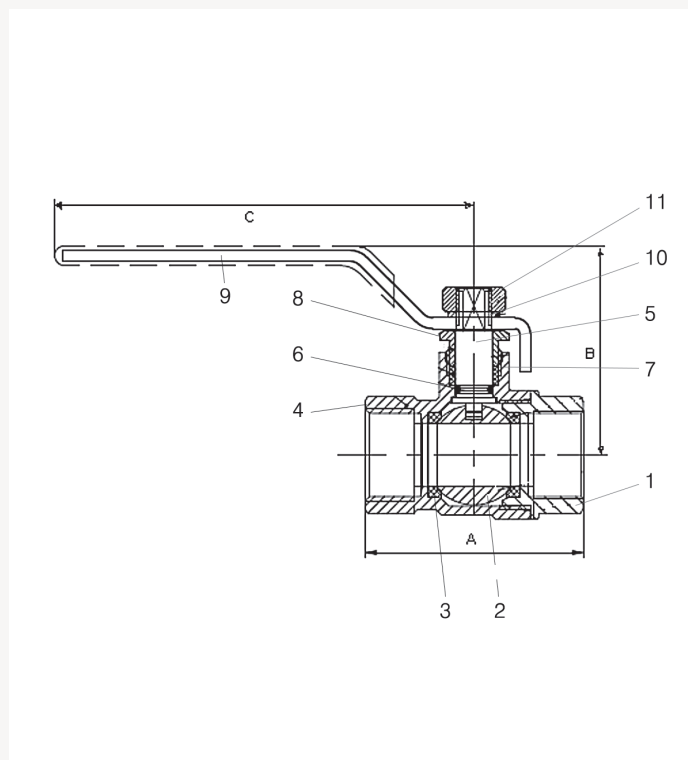

Material specification

1225 Tee handle version: 1/2" to 1"

No	Component	Material	Specification
1	End connector	Brass - chrome plate	EN 12165 CW617N-DW
2	Ball	Brass - chrome plate	EN 12165 CW617N-DW
3	Ball seal	PTFE	PTFE
4	Body	Brass - chrome plate	EN 12165 CW617N-DW
5	Stem	Brass	EN 12164 CW617N-DW
6	Stem O-ring	EPDM	EN 2430: 1995
7	Gland	PTFE	PTFE
8	Packing nut	Brass	EN 12164 CW617N-DW
9	Lever handle	Steel	EN 24T + polyethylene HD
10	Washer	Stainless steel	ISO 15510
11	Lever nut	Stainless steel	ISO 15510

Features and benefits:

- Full bore quarter turn ball valve.
- Blow out proof stem.
- End connections, female taper threads to EN 10226-2 (ISO 7-1) and parallel threads to ISO 228.
- Designed in accordance with WRAS requirements.
- Unique Conex Bänninger lever handle.

1230 Ball Valve

Order code EN 10226-2 (ISO 7-1) thread	Order code ISO 228 thread	Size	DN	A	B	C	Kv value	Weight (kg)
123013RRR250404	123013FFR250404	1/2"	15	55	48	95	16	0.207
123013RRR250606	123013FFR250606	3/4"	20	65	52	95	30	0.333
123013RRR250808	123013FFR250808	1"	25	78	65	130	48	0.602
123013RRR251010	123013FFR251010	1.1/4"	32	91	69	130	100	0.927
123013RRR251212	123013FFR251212	1.1/2"	40	99	80	160	170	1.369
123013RRR251616	123013FFR251616	2"	50	119	88	160	230	2.225

Valve suitability

Product	Steam	Water	Drinking water	Oil	Air (oil free)	Gas (inert)	Gas (combustible)	Gas (corrosive)	Gas (oxygen)
1230	x	✓	✓	✓	✓	x	x	x	x

This valve is not suitable for gas applications.

Max. working parameters

1230	Temperature °C	Pressure bar	Pressure psi
Water	-10 to +120	25	360

Specification clauses:

- Lever operated quarter turn, tight shut-off.
- Chrome plated brass ball, body and end connectors.
- Brass body, stem and cap.
- PTFE seats and stem gland seal.
- EPDM stem O-ring.
- End connections, female taper threads to EN 10226-2 (ISO 7-1) and parallel threads to ISO 228.
- Designed in accordance with WRAS requirements.